

BOE-THERM

Your reliable
partner in
Temperature
Control Units



TEMP 160 S

Pressurized-water temperature control unit up to 160 °C


- ❖ Magnetic driven pump
- ❖ High efficient cooling
- ❖ Easy operation
- ❖ Low noise



BOE-THERM

 Made in Denmark

Equipment:	Standard	Optional
Automatic restart	•	
Solid State Relais	•	
Temperature deviation alarm	•	
Automatic water refilling	•	
Leakage control during operation	•	
Pressure relief after stop		•
Mould draining		•
Automatic cool down function	•	
Flow measuring Vortex		•
Connection for external PT 100 sensor		•
Service indicator (hour counter)	•	
Serial interface 20 mA CL		•
Analog interface 4-20 mA		•
Profibus		•
Ethernet/IP		•
Profinet		•
Devicenet		•

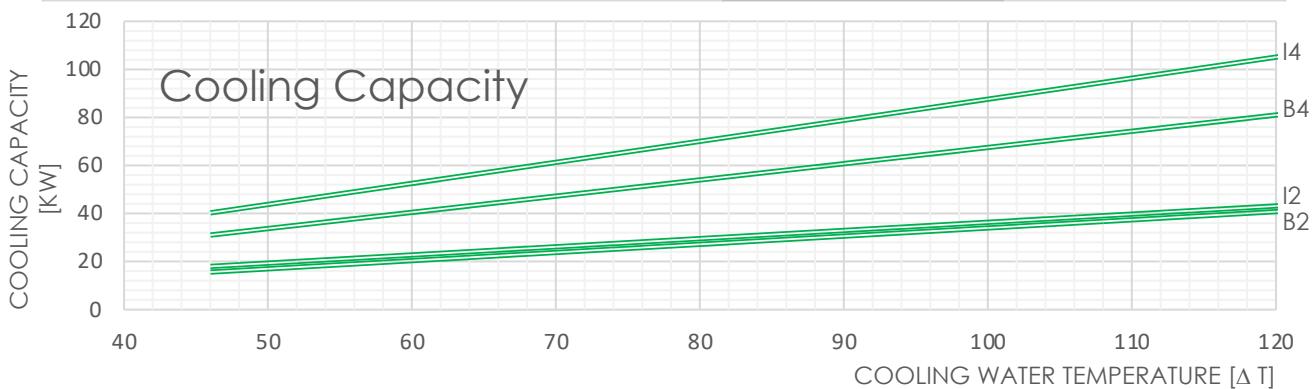

Technical Specifications:

Max outlet temperature	160 °C			
Heating capacity	4,5 kW (opt. 9 - 13,5 - 18kW)			
Heat transfer fluid	Water			
Tank volumen	6 Liter			
Pump	std.			
Type	Q6	Q9		
Flow rate max. l/min	60	90		
Pressure max. Bar	5,7	8,0		
Cooling capacity at $\Delta T = 120$ °C	std.			
Type	I2	I4	B2	B4
kW	44	106	41	81
Connections in/out	1/2"			
Operating voltage std.	3x400V/50Hz - 3x460V/60Hz			
Dimensions (L x W x H)	680 x 270 x 640 mm			